

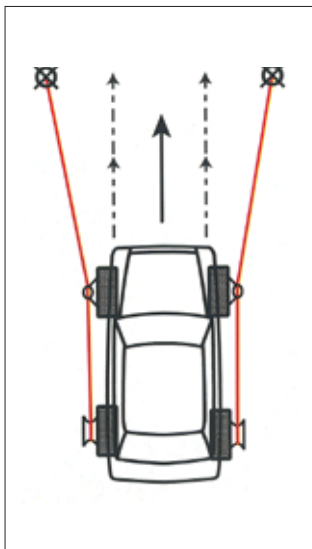
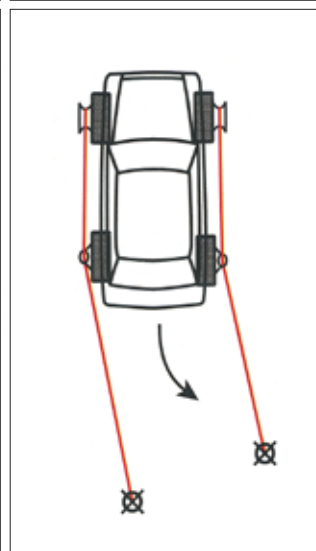


1. Going forwards to separate anchors.

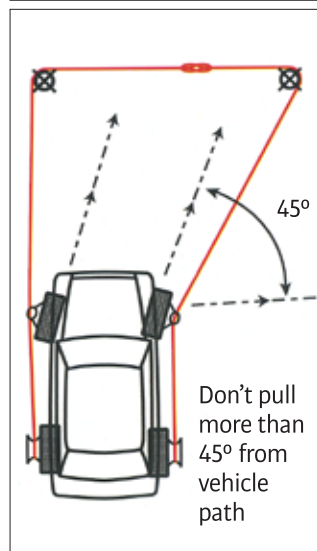

2. Going forward to Bush Bridle Rope anchor points.

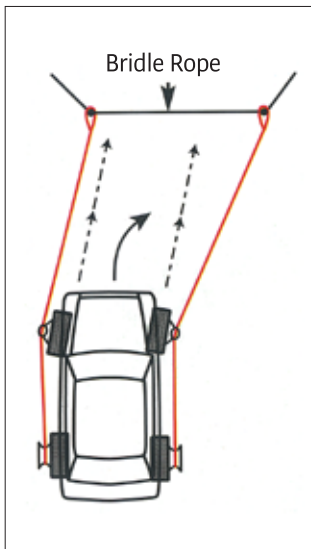

3. Going forward around corner with joined winch rope.

4. Going backward around corner.

Disclaimer and Warnings:

1. Always check the components of the Rope Guide after use. Fraying of the rope spokes or bending of the split-eye-swivel will mean replacement. The split-eye-swivel is certified safe to a load of 2200kg (4850lb).
2. Do not exceed a 45 degree angle of pull to the side.
3. Following use of the Rope Guide, check the integrity of the wheel nuts/lugs and Rope Guide. Replace the wheel nuts/lugs if bent or broken and the same with the split-eye-swivel if deformed in any way.
4. The split-eye-swivel is not a lifting device and is purpose designed and built for use with the Bush Winch.
5. Do not tow a vehicle off the Rope Guides or use them as a winch.
6. Remove the Rope Guides off the vehicle when the recovery is complete. It is not safe to drive on the road with the Rope Guides attached.
7. If there are rope joins, shackles, or knots in the Winch Rope, they may not pass through the eye of the swivel. When winching, set up the Winch Rope so that there is free movement of the rope through the swivel.



www.bushwinch.com



ROPE GUIDES

SKU-S2RG

The Rope Guide acts like a fairlead and makes sure that the winch rope spool onto the winch, even when the winch rope is out at an angle.


One or both Rope Guides can be used at a time, depending on the circumstances. They attach to the head of the Bush Winch wheel nuts/lugs in exactly the same way as the winch does. In a 4WD they are placed on the front wheels if going forward or behind if going backwards.

Align the nuts/lugs with the keyway in the steel attachment plate and push on and turn until the plastic C-lock engages. They can easily be attached and removed at any time.

The Rope Guides feature a purpose built split-eye-swivel which allows the winch rope to be trapped without the need to thread the winchrope through the eye. When winching the swivel will turn allowing the winch rope to move through.

The Rope Guides are very strong and can be used to help pull the vehicle around if slipping sideways. They are a fantastic aid in tricky conditions.


Rope Guides

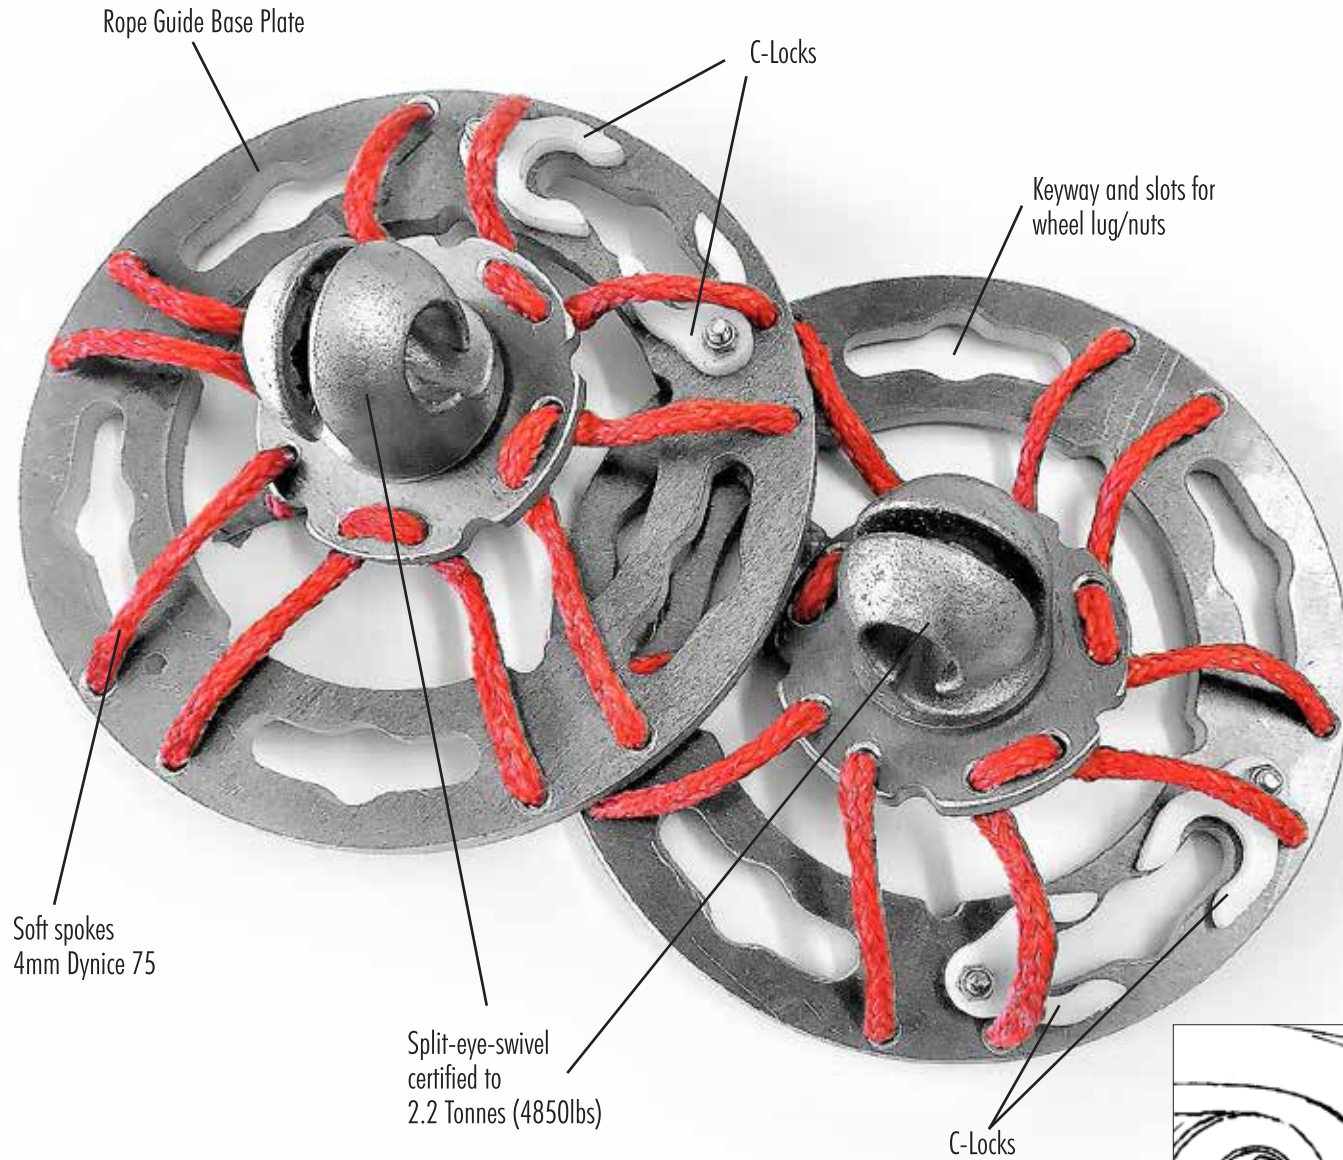


1. Place winch rope into Split-eye-swivel



2. Pull through into the eye.

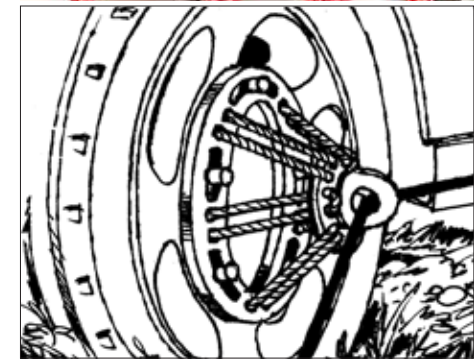

3. Rope Guide placed on front wheel.

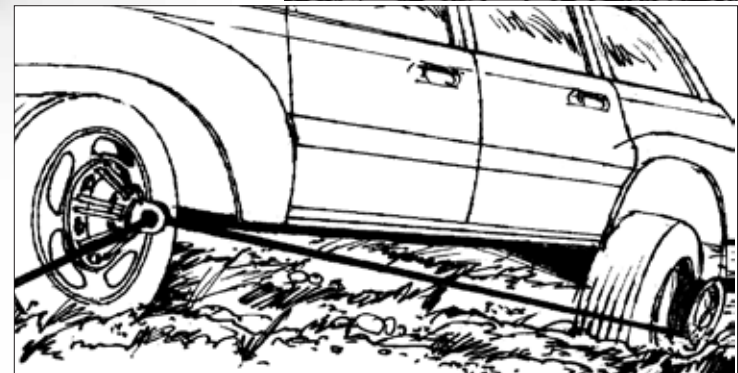

4. Winching from back wheel through front wheel Rope Guide.